



Universal Maintenance Guard

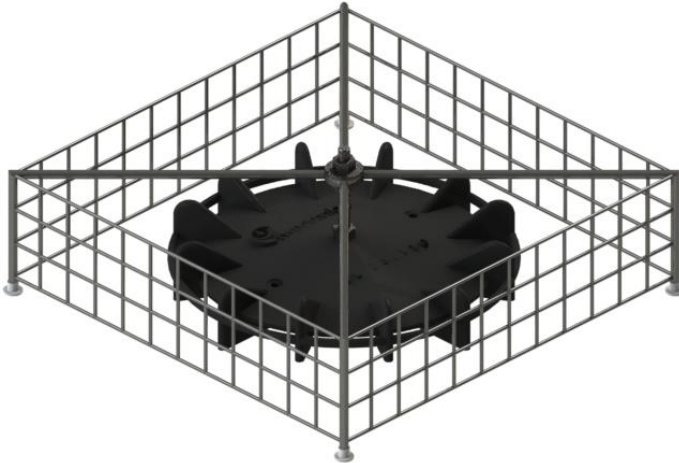

Guard used with CL75/110 Baffle

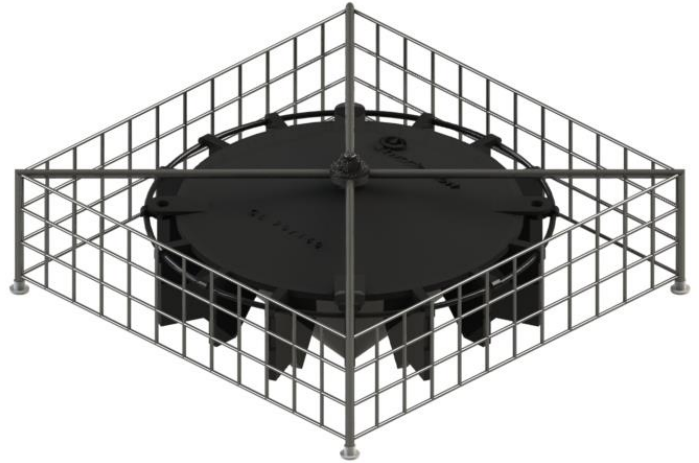

Guard used with CL90/160 Baffle

The Maintenance guard has been developed by Clearflow Products Ltd to assist in the free flow of rainwater into the outlets on buildings experiencing heavy debris build up due to an irregular or intermittent maintenance schedule.

Practical Maintenance Guard Solution

Rwpclearflow Universal Maintenance Guard is a one size fits all solution to debris protection. This component is manufactured from stainless steel 304 12swg mesh with a 6mm round bar support frame. The Universal Maintenance Guard ensures the free flow of water into the outlets by effectively keeping roof debris away from the outlet openings between maintenance visits allowing water to flow over into the open top

Simple fitment to all outlets

The Universal Maintenance Guard is compatible with the full range of Rwpclearflow outlets due to its simple baffle fixing point. The Maintenance Guard bolts directly to the baffle of the CL75/110 & CL90/160 outlets with the addition of a $\varnothing 10\text{mm}$ hole in the top of the baffle/Baffle Plate. An M8 x 70mm long bolt is used for the shorter CL75/110 outlets & a M8 x 30mm bolt used for the taller CL90/160 outlets allowing for height adjustment in all cases. The Guard comes complete with 4 membrane protection feet to prevent damage to the roof covering below. This Guard can also be


fitted to the siphonic & gravity outlets from other manufacturers.

Material

The Rwpclearflow Universal Maintenance Guard is available in the following materials:

- Stainless Steel 304

Critical dimensions

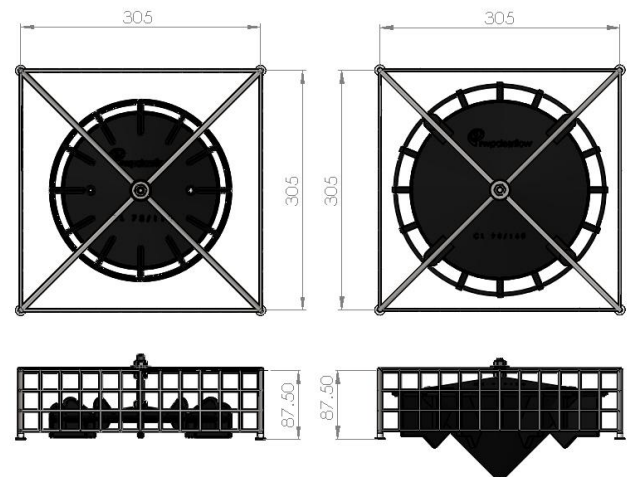

CL75/110 Variant

CL90/160 Variant

Please refer to the Rwpclearflow Maintenance Guard Manufacturing drawing DG001 for additional dimensional data. Guard shown with CL75 & CL90 baffles for illustration purposes only.